



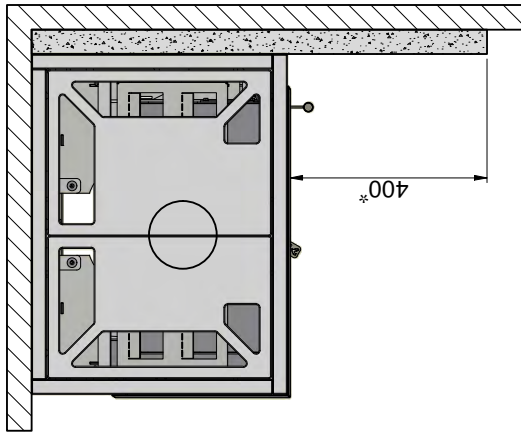

# MINIMUM DISTANCES

Building in the Scan 5003-S against a flammable wall protected by a fire wall

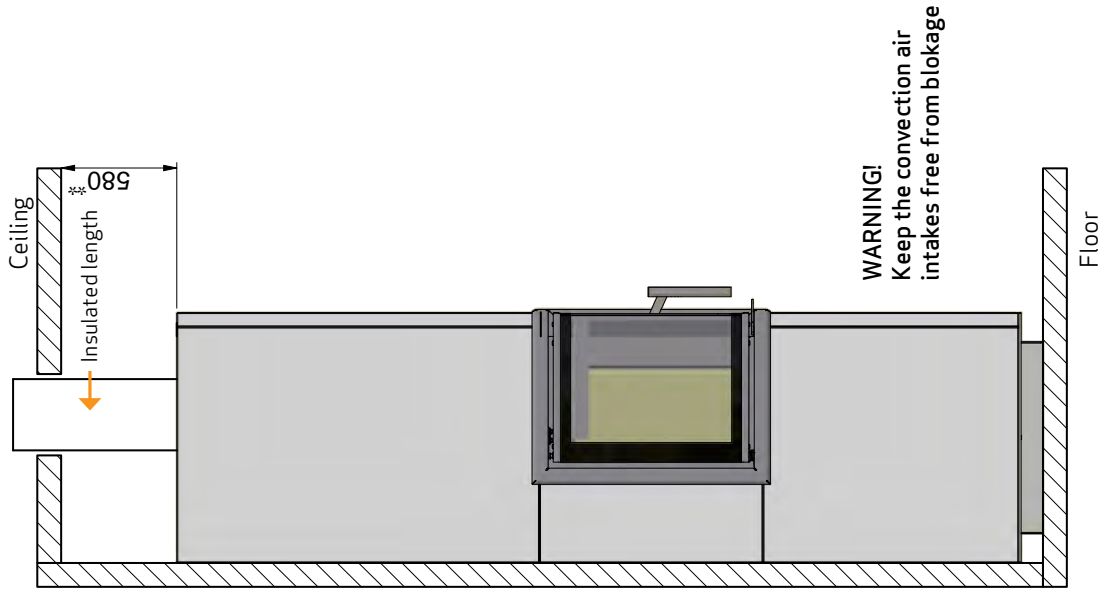

-  Flammable material
-  Fire wall, e.g. 50 mm Jøtul Firewall, 110 mm brick or other material with corresponding fireproof and insulating abilities

All distances are in mm.  
 All distances are minimum distances  
 These distances apply for an insulated flue pipe all the way down to the stove  
 \* Distance to glass  
 \*\* Distance to flammable ceiling