



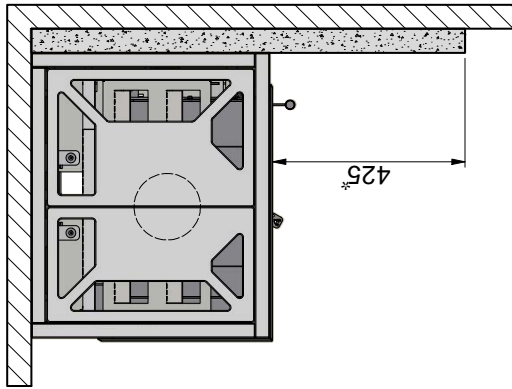

MINIMUM DISTANCES

Building in the Scan 5006-S against a flammable wall protected by a fire wall

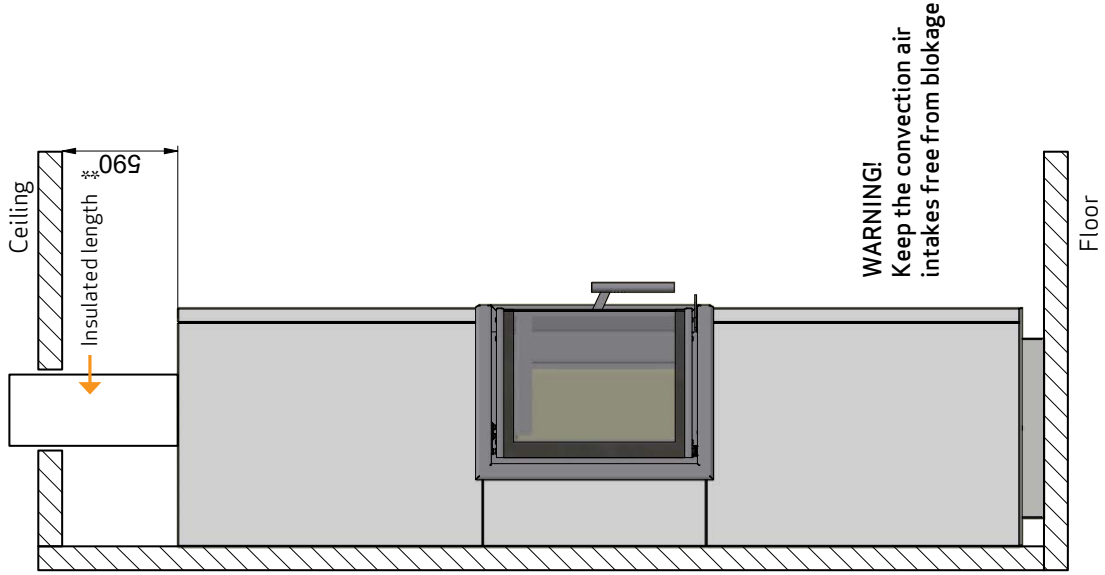

-  Flammable material
 -  Fire wall, e.g. 50 mm Jøtul Firewall, 110 mm brick or other material with corresponding fireproof and insulating abilities
- All distances are in mm.
 All distances are minimum distances
 These distances apply for an insulated flue pipe all the way down to the stove
 * Distance to glass
 ** Distance to flammable ceiling